



VERSADJUST
Adjustable Pedestals

STRENGTH AND SUPERIOR FUNCTIONALITY VERSADJUST ADJUSTABLE PEDESTALS

July 2023


- Integral base leveling to correct for sloped substrates
- Each center-loaded pedestal supports 1250 pounds
- Quick-clip extenders to reach heights fast - up to 36 inches
- Pedestal bracing system for additional stability and heights over 24 inches
- Fast and easy installation - promotes labor savings
- Screw-to-adjust pedestals ensure perfectly level decks
- Impervious to water, mold, and freeze/thaw cycles
- Unique patented design
- Made in the U.S.A.




©2013-2023 United Construction Products, Inc. All Rights Reserved.
Covered by one or more patents or pending patents.

SPECIFICATIONS

- Supports 1250 lbs (567 kg) FoS:3 per pedestal
- Select 1/8 or 3/16 inch (3.2 or 4.5 mm) tab size for pedestals
- Integrated base levelers accommodate 0 to 1/2 inch per foot slope (0-4%)
- Adjustable system height range is 2 1/4 to 36 inches (57 to 914 mm)
- Bison Brace System required for 24 to 36 inches (610 to 914 mm)
- Accessories available for heights from 1/8 to 2 1/4 inches (3.2 to 57 mm)
- Pedestals made of high density copolymer polypropylene
- Contains 20% post-industrial recycled material

	Model No.	Description	Range	Notes
Pedestals	 V1-18 V1-316	Adjustable Pedestal	2-1/4" to 2-3/4" (57 to 70 mm)	--
	 V2-18 V2-316	Adjustable Pedestal	2-3/4" to 3-3/4" (70 to 95 mm)	--
	 V3-18 V3-316	Adjustable Pedestal	3-3/4" to 5-3/4" (95 to 146 mm)	--
	 V4-18 V4-316	Adjustable Pedestal	5-3/4" to 9" (146 to 229 mm)	--
Accessories	 VC2	Quick Clip Coupler	Adds up to 4" (102 mm)	Insert VC2 into V4 base or another VC2 to reach up to 36" (914 mm)
	 VT18 VT316	Spacer Tab	--	Select 1/8" (3.2 mm) or 3/16" (4.5 mm) Tab Width
	 VT18 VT316	Ultra Low Height Pedestal	1/8" (3.2 mm)	--
		Fixed Height Stackable Pedestals	1/4" (6 mm) 1/2" (13 mm) 3/4" (19 mm)	Stack up to 4
	 LO-18 LO-316	Low Height Adjustable Pedestal	1-1/4" to 2" (32 to 51 mm)	Supports 750 lbs (340 kg) FoS:3 per Pedestal
	 B11	Flexible Shim	1/16" (1.5 mm)	--
	 PS1	Rigid Shim	1/8" (3.2 mm)	--
	 LD4	Base Leveler	Adds 1/4" (6 mm)	Stack up to 4 total to base of Pedestals for 1/4" per foot (2%) slope compensation each
	 FS-1	Wood Tile Fastening Kit	Fastens Wood Tiles to Adjustable Pedestals with long screw, and HD50 or HD75 Fixed Height Pedestals with short screw	
	 FS-12 FS-12-WT	12" Fastening Spline 3/16" (4.5 mm) Tab	Fastens Wood Tiles or Paver Trays to Adjustable Pedestals with long screw, and HD50 or HD75 Fixed Height Pedestals with short screw	
 JT	Joist Top Attachment	Adds 3/16" (4.5 mm)	Works with 2x and 4x lumber on Adjustable Pedestals	
 JS	Joist Saddle Attachment	Adds 1/2" (13 mm)	Works with 2 x and 4 x lumber alone or on any Bison Pedestal	
 FIB	Floating Insulation Base	12" x 12" x 11/16" (305 x 305 x 17 mm)	For use over roofing systems with 20 to 40 psi insulation	
 FFB	Floating Foundation Base	12" x 12" x 1/4" (305 x 305 x 6 mm)	For use over soil	

IMPORTANT: Refer to Versadjust product specifications to ensure proper use and installation. For more information visit www.bisonip.com.

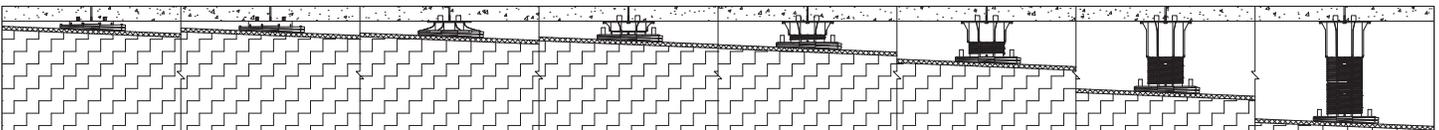

FIXED HEIGHT PEDESTALS		ADJUSTABLE PEDESTALS					
HD50 + 2 LD4 (1/2")	HD75 + 2 LD4 (3/4")	LO + 2 LD4 (1-1/4" to 2")	V1 (2-1/4" to 2-3/4")	V2 (2-3/4" to 3-3/4")	V3 (3-3/4" to 5-3/4")	V4 (5-3/4" to 9")	V4 + VC2 (9" to 13")