



**BISON BRACE**  
works with VERSADJUST

## INNOVATION AND STABILITY

### BISON BRACE SYSTEM

January 2018

The Bison Brace System was designed for use on Pedestal installations where additional stability is deemed necessary. Whether installing a curbside Pop Up Park outside a coffee shop or a Rooftop Deck with extended pedestal heights on a university campus, the Bison Brace System includes a variety of features for simple and easy installation. The Bison Brace System's compatibility with wood tiles, stone, or concrete pavers leaves your unique design options limitless.

Bison Brace System Features:

- Adjustable brace arms that lock into fixed lengths
- Quick clip attachments to secure braces
- Two peg attachments for structural rigidity

Made in the U.S.A.

US Patent and Patents Pending. Copyright 2018 United Construction Products, Inc. All Rights Reserved.

BISON INNOVATIVE PRODUCTS | 701 OSAGE STREET, BLDG 2, UNIT 120, DENVER, CO 80204 USA | 800-333-4234 | [www.BISONIP.COM](http://www.BISONIP.COM)


# SPECIFICATIONS

- Supports 1250 lbf (5.56 kN) FS:3 per pedestal
- Select 1/8 or 3/16 inch (3.175 or 4.5 mm) tab size for pedestals
- Adjustable system height range is 1¼ to 36 inches (31.75 to 914.4 mm)
- Pedestals made of high density copolymer polypropylene
- Contains 20% post-industrial recycled material
- Impervious to water, mold, and freeze/thaw cycles
- Made in the U.S.A.

	Model No.	Description	Range	Notes
	BB-PEGS	Brace Attachment Peg	--	Snaps into LO or V-Series pedestal base
	BB-C	Brace Collar	--	Screws onto V4 pedestal or VC2 extender
	BB-CONNECT	Fixed Height Brace Connector	--	Connects BB-FH to BB-PEGS or adjustable pedestal base
	BB-FH	Fixed Height Brace Kit Includes BB-Screws	Fits 8.5" - 25.5" (216 - 647 mm) pavers	Attaches to HD50, HD75 or BB-CONNECT
	BB-BRACE	Brace Kit Includes BB-Latches	Fits 11.75" - 36" (299 - 914 mm) pavers	Attaches to BB-PEGS or BB-C
	HD50-18 HD50-316	Fixed Height Stackable Pedestal	1/2" (12.7 mm)	Stack up to 4
	HD75-18 HD75-316	Fixed Height Stackable Pedestal	3/4" (19.05 mm)	Stack up to 4
	LO-18 LO-316	Low Height Adjustable Pedestal	1 1/4" - 2" (31.75 - 51 mm)	Supports 750 lbf (3.34 kN) FS:3 per pedestal
	V1-18 V1-316	Adjustable Pedestal	2 1/4" - 2 3/4" (57.15 - 69.85 mm)	--
	V2-18 V2-316	Adjustable Pedestal	2 3/4" - 3 3/4" (69.85 - 95.25 mm)	--
	V3-18 V3-316	Adjustable Pedestal	3 3/4" - 5 3/4" (95.25 - 146.05 mm)	--
	V4-18 V4-316	Adjustable Pedestal	5 3/4" - 9" (146.05 - 228.6 mm)	--
	VC2	Quick Clip Extender	Adds up to 4" (101.6 mm) each	Insert VC2 into V4 base or another VC2 to reach up to 36" (914.4 mm)


## BISON BRACE SYSTEM -- EXTENDED CAVITY HEIGHT

Bison Versadjust Pedestals must be braced for stability to accommodate heights in excess of 24" up to a maximum of 36". Structural perimeter containment, with no more than 1/8" width spacing, on all sides of the pedestal deck system is required. In addition, one level of Bison Braces may be used on any Versadjust installation where additional stability is deemed necessary.

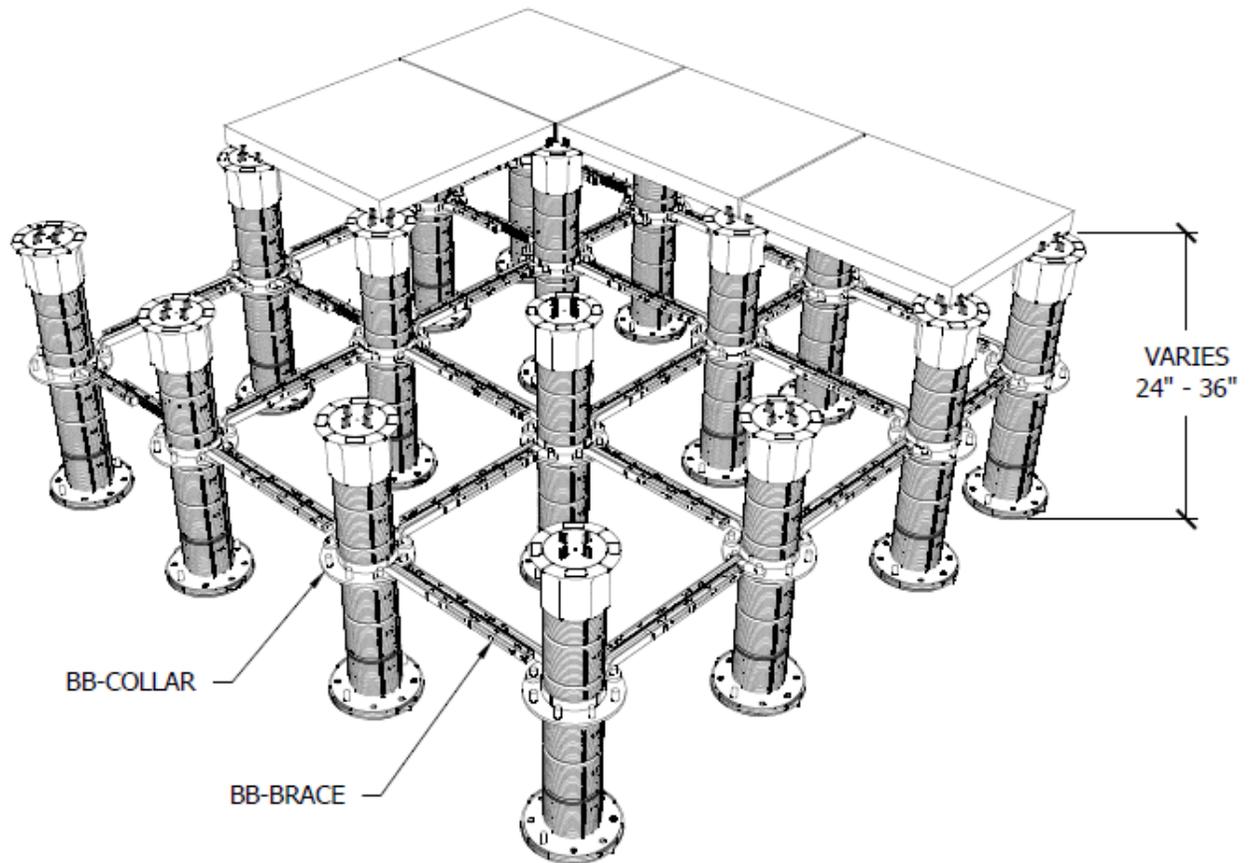

## BISON BRACE SYSTEM -- ADDED STABILITY

Bison fixed height and adjustable pedestals can be braced in applications where added stability is needed. For fixed height pedestals, snap the BB-FH into the side of an HD50 or HD75. Use a BB-Connect to attach the BB-FH to an adjustable pedestal. Lock the bracing arms together by inserting BB-Latches into the side of each BB-Brace or BB-Screws into the top of each BB-FH, and twist 90 degrees.

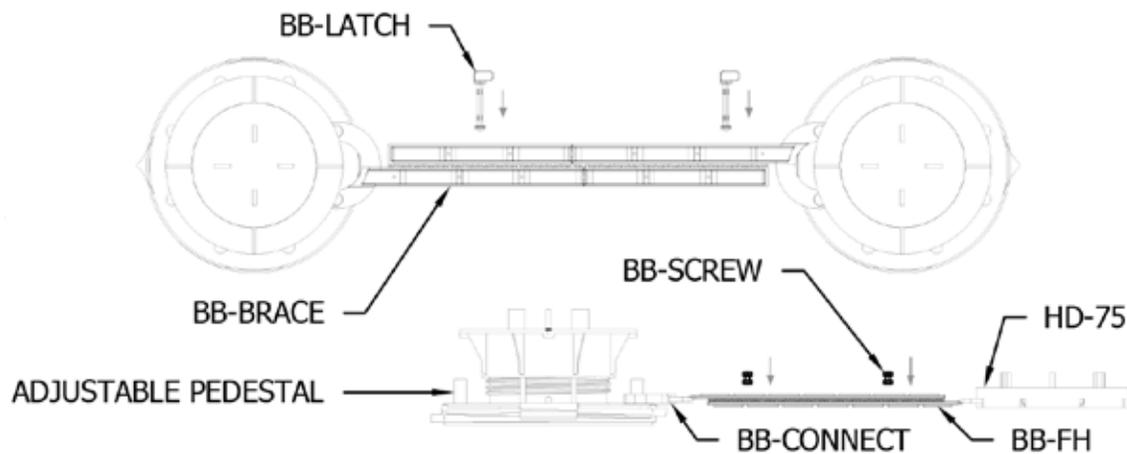

Important: Refer to Bison IP Product Specifications to ensure proper use and installation. Find Bison IP Product Specifications at [www.BisonIP.com](http://www.BisonIP.com).

US Patent and Patents Pending. Copyright 2018 United Construction Products, Inc. All Rights Reserved.