





October 2020

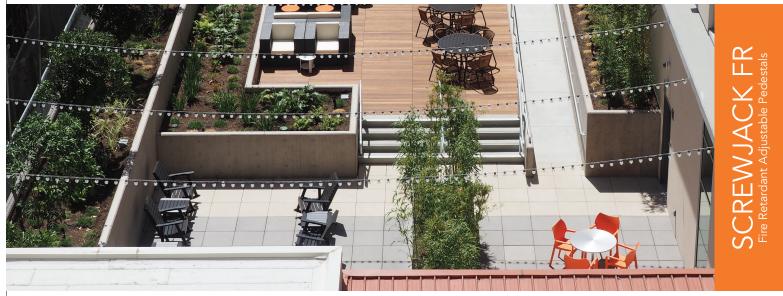

SAFETY AND STABILITY SCREWJACK FR ADJUSTABLE PEDESTALS

- Bison's self-extinguishing ScrewJack Fire Retardant (FR) Pedestals
- Screw-to-adjust Pedestals are easy to install and ensure perfectly level decks
- Meets Los Angeles Building Code Requirements (LARR #26198) with the following surface materials:
 - Bison Ipê Wood Tiles
 - Bison 2CM Paver and Paver Tray System
 - Concrete Pavers
- Meets the following testing criteria:
 - UL 94: V-0 Rating (Self-Extinguishing)
 - ASTM D635: Meets IBC (CC1 Rating) and FBC (C-1 Rating) Code Classes
 - ASTM D1929: Self-Ignition exceeds requirement (≥ 650°F)
- Wind and Seismic testing available
- Sold exclusively through Oldcastle Westile
- Made in the U.S.A.

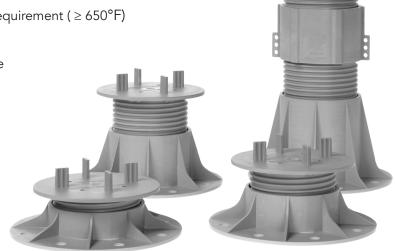

©2020 United Construction Products, Inc. All Rights Reserved. Covered by one or more patents or pending patents.

Specifications

- Supports 850 lbs (386 kg) FoS:3 per Pedestal
- Pedestal tab width 3/16" (4.5 mm)
- Adjustable system height range is 1-1/4" to 24" (32 to 610 mm)
- FR Accessories available for heights from 1/8" to 1-1/4" (3.2 to 32 mm)
- Pedestals made of 20% Talc Filled FR Polypropylene Homopolymer (Bison #B-PP-FR)
- Impervious to water, mold, and freeze/thaw cycles
- Made in the U.S.A.

		Model No.	Description	Height Range	Notes
PEDESTALS		B1-FR	Fire Retardant Adjustable Pedestal with 3/16" (4.5 mm) Tabs	1-1/4" to 2" (32 to 51 mm)	
		B2-FR	Fire Retardant Adjustable Pedestal with 3/16" (4.5 mm) Tabs	2" to 3" (51 to 76 mm)	
	肃	B3-FR	Fire Retardant Adjustable Pedestal with 3/16" (4.5 mm) Tabs	3" to 4-3/4" (76 to 121 mm)	
		B4-FR	Fire Retardant Adjustable Pedestal with 3/16" (4.5 mm) Tabs	4-3/4" to 7-3/4" (121 to 197 mm)	
		C4-FR	Fire Retardant Coupler	Adds up to 4" (102 mm)	For use with Model B3 or B4 only
ACCESSORIES	4-6	VT316-FR	Fire Retardant Ultra Low Height Pedestal with 3/16" (4.5 mm) Tabs	1/8" (3.2 mm)	
		HD25-316-FR	Fire Retardant Fixed Height Stackable Pedestals with 3/16" (4.5 mm) Tabs	1/4" (6 mm)	Stack up to 4
		HD50-316-FR	Fire Retardant Fixed Height Stackable Pedestals with 3/16" (4.5 mm) Tabs	1/2" (13 mm)	Stack up to 4
		HD75-316-FR	Fire Retardant Fixed Height Stackable Pedestals with 3/16" (4.5 mm) Tabs	3/4" (19 mm)	Stack up to 4
		LD4-FR	Fire Retardant Base Leveler	Adds 1/4" (6 mm) to Pedestal height Compensates for 1/4" per foot (2%) slope	Stack up to 4 below base of Pedestal
Model	MRTANT: Refer to Screer use and installation	Model B1 www.deck product specifications at the specifications at the specifications at the specification of the	Model B3 4 3/4" - 7 3/4" Model B4 ations to ensure	7 3/4" - 9" Model B3 + Coupler Model B4 + Coupler	Base Leveler Model LD4 Stack up to 4 12" - 16" Model B4 + 2 Couplers